

S2F180N40NI

400V Non-isolation FRD Module

Features

- Repetitive Reverse Voltage: $V_{RRM} = 400V$
- Low Forward Voltage: $V_F(\text{typ.}) = 1.2V$ @ $I_F = 180A$
- Average Forward Current: $I_{F(AV)} = 180A$ @ $T_C = 100^\circ C$
- Ultrafast Reverse Recovery Time: $t_{rr}(\text{typ.}) = 90ns$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Non-isolation Type Package
- $175^\circ C$ Operating Junction Temperature
- Built-in Dual FRD Construction


Applications

- High Speed & High Power converters, Inverter Welders
- Various Switching and Telecommunication Power Supply


Description

The Ultrafast Recovery Diode Module Devices are optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems. The Ultrafast Recovery Diode Module is ideally suited for power converters, inverter welders, motors drives and other applications where switching losses are significant portion of the total losses.

Package Type & Internal Circuit



3SM-NI



Common Heat Sink

Absolute Maximum Ratings (Per leg at $T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter		Ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage		400	V
V_R	DC Blocking Voltage		320	V
$I_{F(AV)}$	Average Rectified Forward Current	$T_C = 25^\circ C$	300	A
		$T_C = 100^\circ C$	180	
I_{FSM}	Non-repetitive Peak Surge Current 60Hz Single Half-sine Wave		2300	A
I^2t	I^2t For Fusing 60Hz Sine Wave		30×10^3	A^2S
P_D	Maximum Power Dissipation		750	W
T_J	Junction Temperature		$-55 \sim +175$	$^\circ C$
T_{STG}	Storage Temperature Range		$-55 \sim +150$	$^\circ C$
	Mounting Torque (M6)		5.0	N.m
	Terminal Torque (M6)		3.0	N.m
	Weight		95	g

Electrical Characteristics (Per diode @T_C=25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _F	Forward Voltage Drop	I _F =180A	-	1.2	1.35	V
		I _F =180A, T _C =100°C	-	1.05	-	V
I _{RM}	Reverse Leakage Current	V _R =400V	-	-	0.5	mA
		V _R =400V, T _C =100°C	-	-	1	mA
t _{rr}	Reverse Recovery Time	I _F =1A, di/dt=-200A/us	-	34	-	ns
t _{rr}	Reverse Recovery Time	I _F =180A, di/dt=-200A/us	-	90	115	ns
I _{rr}	Reverse Recovery Current		-	9.0	-	A
t _{rr}	Reverse Recovery Time	I _F =180A, di/dt=-200A/us, T _C =100°C	-	140	-	ns
I _{rr}	Reverse Recovery Current		-	14.5	-	A

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
R _{th (J-C)}	Thermal Resistance, Junction to case	0.17	°C/W

Typical Performance Characteristics

Fig. 1. Typical Characteristics: V_F vs. I_F

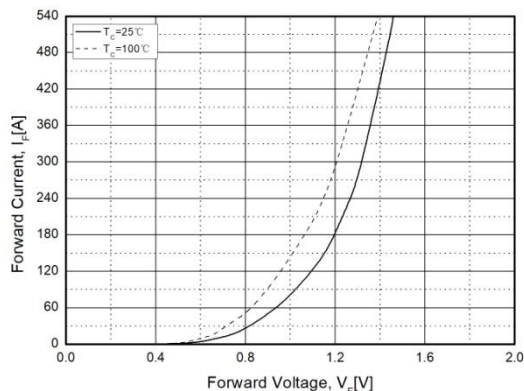


Fig. 2. Typical Reverse Recovery Time vs. di/dt

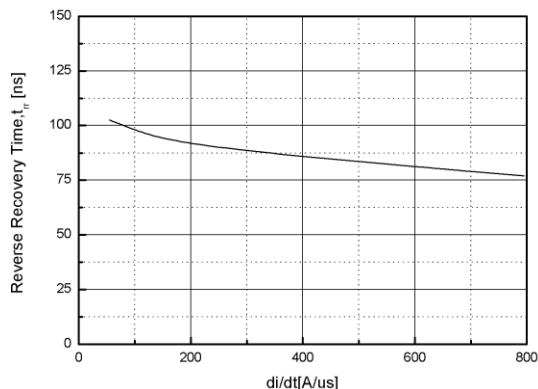


Fig. 3. Transient Thermal Impedance Characteristics (R_{thjc})



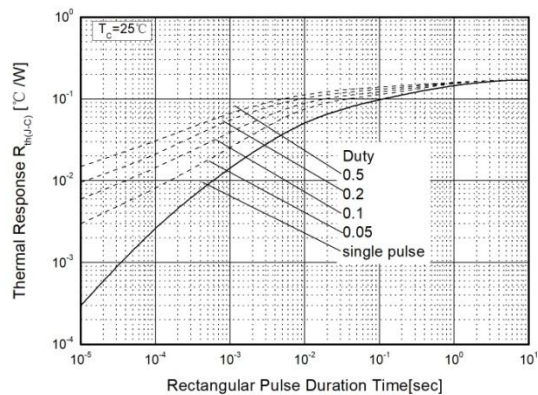


Fig. 4. Forward Current Derating Curve

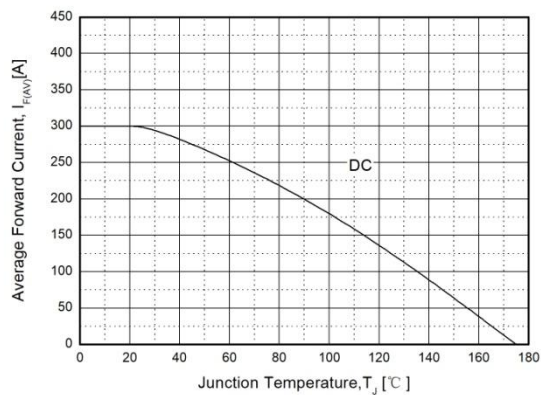


Package Dimensions

3SM-NI

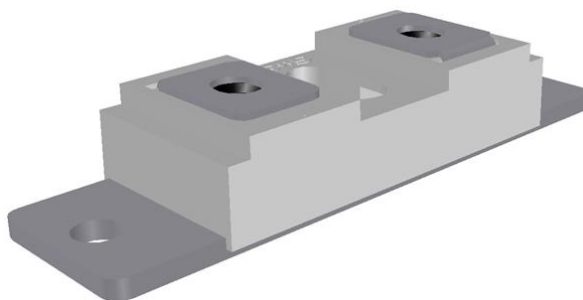

(Dimensions in Millimeters)

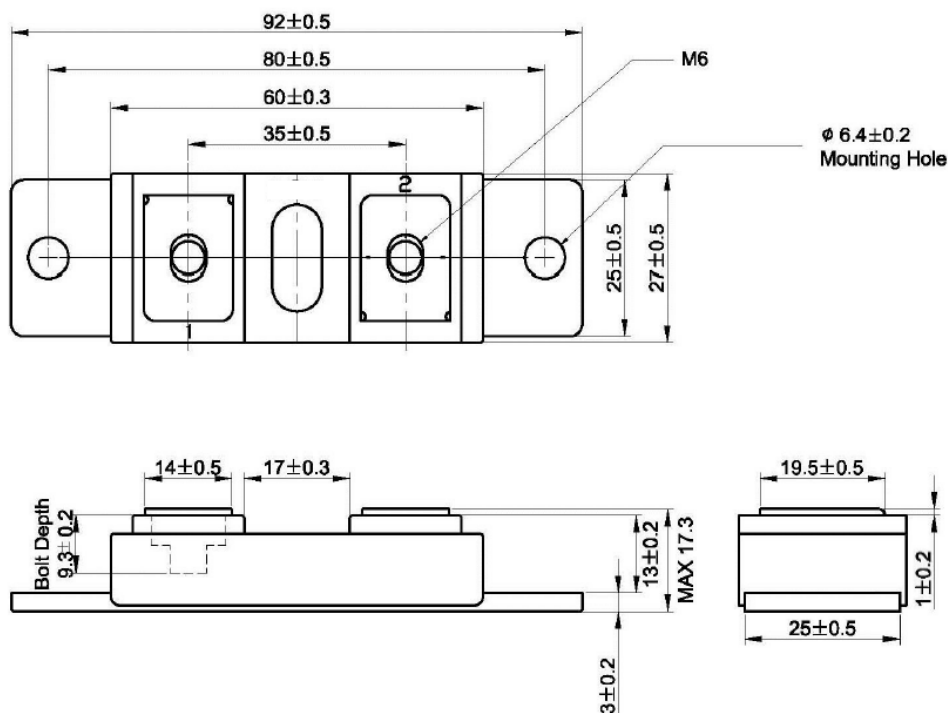

DISCLAIMER:

The products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any product can reasonably be expected to result in a personal injury. Seller's customers using or selling seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Sunnychip reserves the right to change the specifications and circuitry without notice at any time. Sunnychip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Sunnychip product.  is a registered trademark of Sunnychip Semiconductor Co., Ltd.